

ST-3300

FULL MOISTURE PENETRATING RF TECHNOLOGY




Control Moisture at Critical Stages in Your Process

OVERVIEW

The ST-3300 is a smart analyzer for process moisture measurement and control of materials used in chemical, mining, textiles, agriculture, and other industries. Used by quality assurance professionals, the ST-3300 improves methods for controlling moisture at key areas in a manufacturing process, helping operations conserve energy, reduce waste, increase capacity, and generate revenue.

As a radio frequency dielectric measurement (RF) technology, the ST-3300 provides a rapid and complete moisture measurement of products at full line speeds.

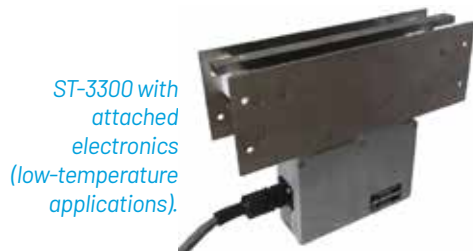

ST-3300 with attached electronics (low-temperature applications).



ST-3300 in a high-temperature application.

APPLICATIONS

Since many materials used in an industrial process have quality standards relating to moisture, the ST-3300 is a smart, simple, and effective solution to help operators manage moisture monitoring.

- **Lumber and wood:** Saw dust, hog fuel, veneer, plywood, biomass, wood pellets
- **Building products:** Gypsum products, brick, board products
- **Textile mill products:** Broad-woven fabric, non-woven fabric
- **Paper products:** Pulp, paper, paperboard, containers & boxes, converted paper & paperboard products


ST-3300 FEATURES

- Signal processing capabilities can be integrated into transmitter electronics
- Mounting options available to accommodate diverse process locations
- Interfaces directly with your preferred HMI (PC, PLC, and optional 305 mm (12 in) touch screen display)
- Advanced digital conditioning for improved standard of resolution
- Optional product temperature measurement capabilities available



RADICALLY IMPROVED RF RESOLUTION & STABILITY


The ST-3300 features a patented RF measurement principle enhanced by all-digital phase-lock loop signal conditioning, presenting a higher standard of resolution and stability. Signal processing capabilities are integrated into the transmitter electronics, which interfaces directly with your preferred HMI.

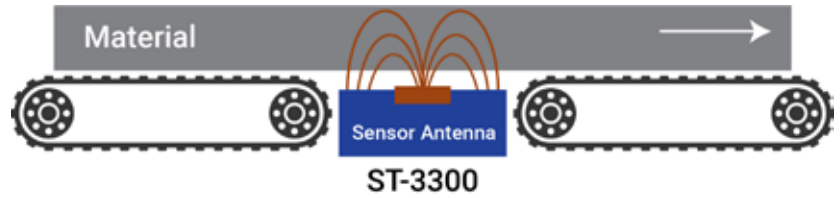

The ST-3300 is an open-frame configuration that is installed between conveying belts or rollers exiting or entering a kiln or dryer. Antenna lengths are available from 150 mm - 2440 mm (6 in - 96 in) dependent upon temperature.

INTUITIVE ANALYSIS SOFTWARE

The ST-3300 includes a powerful configuration software package that provides management utilities for all sensors in your process through a laptop, PC, or optional touch screen display. Moisture and other parameters are displayed in a clear and easy-to-use interface.

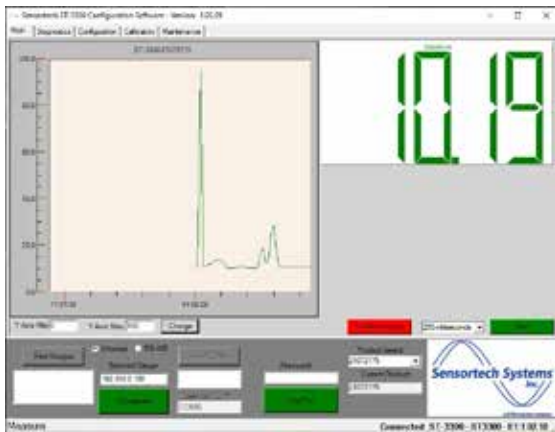

PC interface



Optional touch screen interface

SPECIFICATIONS

Name	Specification
Input Power	Voltage: 110/240VAC - 50/60 Hz – Power: 30 Watts
Antenna Lengths	Low Temperature = 152 mm (6 in), 305 mm (12 in), 610 mm (24 in), 660 mm (26 in), 1220 mm (48 in), 2440 mm (96 in) High Temperature = 610 mm (24 in), 1220 mm (48 in), 1830 mm (72 in), 2440 mm (96 in) Ultra High Temperature = 1220 mm (48 in), 1520 mm (60 in)
Sensor Temperature	Low: 0-60°C (32-140°F); High: Up to 260°C (500°F); Ultra High: Up to 540°C (1000°F)
Sampling Rate	Moisture ±0.05% - 0-1% Range; Moisture ±0.10% - 0-10 % Range; Moisture ±0.25% - 10-30% Range; Moisture ±1.00% - 30-60% Range
Accuracy	Gypsum Board = ±0.02%; Wood Panel Board = ±0.10%, both subject to the application
Resolution	Moisture ±0.02%
Communication	Standard I/O: 1 4-20mA Output, 1 RS-485 Full Duplex, 1 Digital Input, 1 Product Temp Input, 1 Ethernet TCP/IP Advanced I/O: 2 4-20mA Outputs, 2 Digital Inputs, 1 Product Temp Input

KPM Analytics

8 Technology Drive | Westborough, MA 01581 USA
Phone: +1 774.399.0500
www.kpmanalytics.com | sales@kpmanalytics.com

©Copyright 2025. All rights reserved. 05.005.0200.EN.v3

