

MULTIPLE ROLLER BELT SCALE, EBW-M4 (M3)



for installation into existing conveying belt systems

TECHNICAL DATA:

Conveying material:	Bulk materials
Conveying capacity:	1 t/h – 10000 t/h
Belt speed:	0,1 m/s up to 5 m/s
Belt width:	300 mm up to 2800 mm
Bulk density:	100 kg/m ³ – 4000 kg/m ³
Granulation:	dusty to coarse-grained
Inclination:	horizontal up to 20 degrees increasing or decreasing
ATEX:	versions available
Accuracy:	± 0,125 – 0,5 %

Construction material and minerals | Gypsum | Cement | Steel | Chemistry | Coal | Waste industry | Plastics | Food | Animal feed | ...


If required customized special solutions are available!

REQUIREMENTS:

straight section in the area of the scale and appropriate setting distance after material transfer

SIGNIFICANT BENEFITS:

- | easy construction
- | easy installation in existing systems
- | test weight for an easy and quick check of the weighing accuracy
- | versatile in use
- | minimal maintenance works
- | heavy duty design

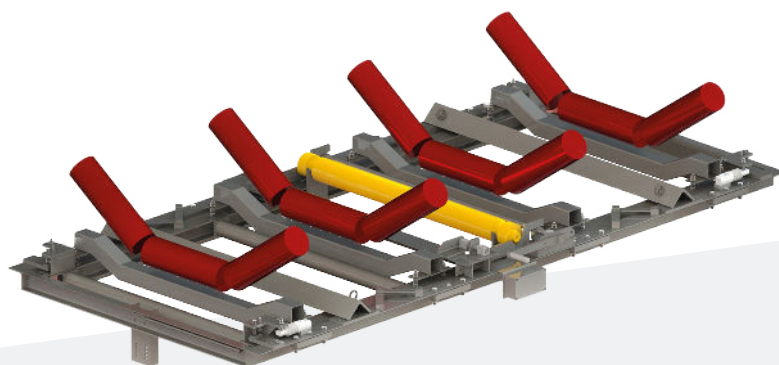

FUNCTION OF THE MULTIPLE ROLLER BELT SCALE, EBW-M4

Scales of the series EBW-M4 (M3) are suitable for installation into existing conveying belt systems. They are used for measuring and totalizing of bulk material flow. The multiple roller belt scale is applied for very high accuracy requirements and if the belt speed is very high. The transmission of the load to the load cell will be conducted by leverage or the weighing bridge is mounted on several load cells. For the speed measuring a digital tachometer is provided which is either running on the return belt or attached to the tail pulley.

Optionally the scale can be equipped with a test weight device, which serves for a quick and easy checking of the weighing accuracy.

Legal for trade versions are available (MID)!

Price on request: office@kukla.co.at or 0043 / (0)7672 / 26666 – 0

Entrusted as a trade secret. All rights reserved.

KUKLA WAAGENFABRIK GMBH & CO KG

Stefan-Fädinger-Str. 1 – 11 | 4840 Vöcklabruck | AUSTRIA | Phone: +43 (0) 7672 266 66-0 | Fax: +43 (0) 7672 266 66-39 | Mail: office@kukla.co.at | www.kukla.co.at